

## STRAIGHT TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

### CONNECTION TAP:

- Male thread G3/8"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

### WEIGHT:

- 525 gr

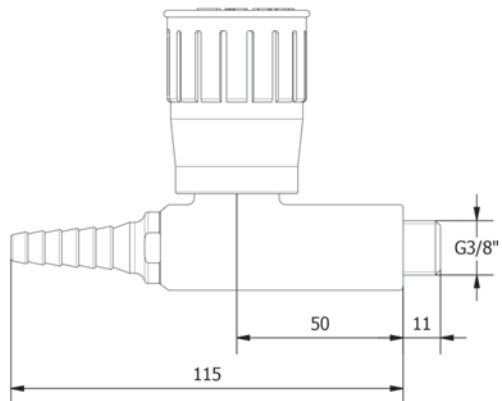

## TAP WITH 45° NOZZLE

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

### CONNECTION TAP:

- Male thread G3/8"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

### WEIGHT:

- 376 gr

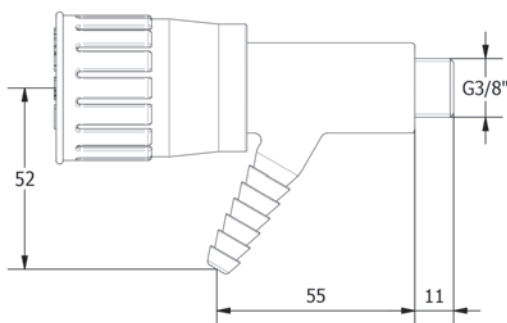

## WALL MOUNTED TAP 45° NOZZLE WITH INCLINED HANDLE

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

### CONNECTION TAP:

- Male thread G3/8"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

### WEIGHT:

- 468 gr

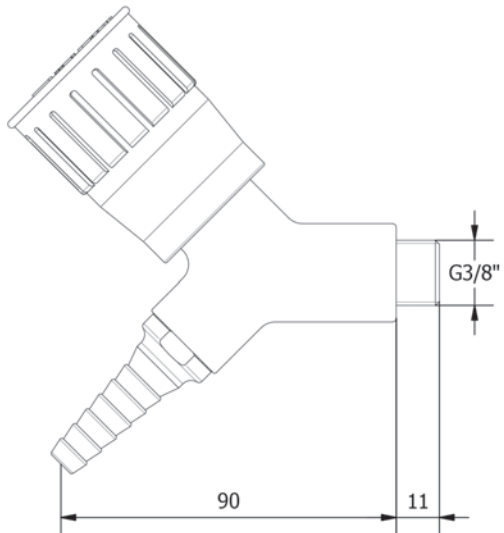

## WALL MOUNTED 90° TAP

### APPLICATION:

- Wall mounting

### DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

### CONNECTION TAP:

- Male thread G3/8"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

### WEIGHT:

- 381 gr

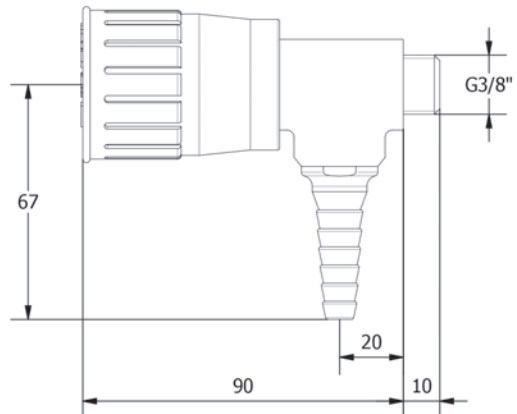

# TECHNICAL GASES

# 13006.1

## STRAIGHT TAP WITH 45° NOZZLE

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

### CONNECTION TAP:

- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

### WEIGHT:

- 511 gr

